

THE COMMISSIONER OF PATENTS AND TRADEMARKS  
Washington, D.C. 20231

Docket No. MV99-001

Sir:

Transmitted herewith for filing is the Patent Application of:

Inventor: **BEOMSUP KIM**

For: **A METHOD AND APPARATUS FOR DIGITAL NEAR-END ECHO/NEAR-END CROSSTALK CANCELLATION  
WITH ADAPTIVE CORRELATION**

Enclosed are:

- ☒ 9 sheets of drawing(s) - formal.
- ☒ An assignment of the invention to Marvell Technology Group, Ltd.
- ☐ An associate power of attorney

The filing fee has been calculated as shown below:

	(Col. 1)	(Col. 2)	OTHER THAN A SMALL ENTITY	
FOR:	NO. FILED	NO. EXTRA	RATE	FEE
BASIC FEE				\$ 760.
TOTAL CLAIMS	31 -20=	11	x 18 =	\$ 198.
INDEP CLAIMS	4 -3=	1	x 78 =	\$ 78.
MULTIPLE DEPENDENT CLAIM PRESENTED			+ 260 =	
			SUB TOTAL	\$ 1,036.
			ASSIGNMENT	\$40.
			TOTAL	\$ 1,076.

- ☒ Please charge my Deposit Account No. 19-0033 in the amount of \$ 1,076. A duplicate copy of this sheet is enclosed.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 19-0033. A duplicate copy of this sheet is enclosed.
- ☒ Any additional filing fees required under 37 CFR \$1.16.
- ☒ Any patent application processing fees under 37 CFR \$1.17.

Respectfully submitted,  
*George O. Saile*  
GEORGE O. SAILE, REG. NO. 19,572

625 U.S. PTO

12/17/99

135 U.S. PTO

09/465228

12/17/99

# **A Method and Apparatus for Digital Near-End Echo/Near-End Crosstalk Cancellation with Adaptive Correlation**

## **Background of the Invention**

### **Field of the Invention**

5           The present invention relates to apparatus and methods for  
communication of signals in a communication medium. More particularly, this  
invention relates to apparatus and methods to cancel echo interference and  
near-end crosstalk interference in a received signal from a transmitter attached  
to the communication system and from transmitters attached to other  
10   communication media in close proximity to the communication media.

### **Description of the Related Art**

          The gigabit Ethernet (1000 BASE-T) as defined by the IEEE standard  
802.3ab is well known in the art. The structure capabilities and design  
15   consideration are described in:

"Gigabit Ethernet Over 4-Pair 100 OHM Category 5 Cabling," Gigabit  
Ethernet Alliance, Cupertino, CA, 1999,

20   "Gigabit Ethernet 1000 Base-T," 1000 BASE-T Tutorial Series,  
Interoperability Laboratory Gigabit Ethernet Consortium, University of New  
Hampshire, Durham, NH, 1998,

"Design Considerations for Gigabit Ethernet 1000 Base-T Twisted-pair Transceivers," Hatamian et al., Proceedings of the IEEE 1999 Custom Integrated Circuit Conference, IEEE, 1998, pp. 335-342.

5 Transmitting a gigabit data stream over four pair of category 5 unshielded twisted-pair cabling as described in the above-referenced papers has several design challenges. These challenges include signal attenuation, echo return loss, crosstalk characteristics of the cable, and electromagnetic emission and susceptibility.

10 Attenuation is the signal loss of the cabling from the transmitter to the receiver. Attenuation increases with frequency, which is due to such factors as skin effect. To minimize the effect of attenuation, the lowest possible frequency range that is consistent with the required data rate must be employed.

15 Echo is a by-product of the dual-duplex operation, where both the transmit and receive signal occupy the same wire pair. The residual transmit signal due to the trans-hybrid loss and the cabling return loss combine to produce an unwanted signal referred to here as echo.

20 Return loss is a measure of the amount of power reflected due to cabling impedance mismatches.

Crosstalk is an unwanted signal coupled between wire pairs that are in close proximity. Since 1000 BASE-T will use all four wire pairs, each pair is affected by crosstalk from the adjacent three pairs. Crosstalk is characterized in reference to the transmitter. Near-end crosstalk (NEXT) is crosstalk that  
5 appears at the output of a wire pair at the transmitter end of the cable and far-end crosstalk (FEXT) that appears at the output of a wire pair at the far end of the cable from the transmitter. Equal level far-end crosstalk (ELFEXT) is FEXT with the cable attenuation removed to provide equal level comparisons, i.e. crosstalk and receive signals voltages are compared at the end of the cabling  
10 opposite the transmitter. Crosstalk must be minimized to insure correct symbol recovery operations in the receiver.

A transmission system operating over unshielded cable must be capable of withstanding radiated energy from other sources, including AM, CB, short  
15 wave radio, and other external transmitters. The transmission system is required to have a tolerance to a 3 V/m continuous wave source above 27 MHz.

A further requirement is that the transmission system be immune to background and impulse noise. Impulse noise can be generated by power line  
20 transients, electrical fast transients, electrostatic discharge (ESD), and other sources.

Refer now to Fig. 1 for a discussion of near-end echo interference and near-end crosstalk. Fig. 1 shows a diagram of a gigabit Ethernet communications system. The gigabit Ethernet has two nodes that transmit and receive 1000 M bits per second (bps) full-duplex and bi-directionally. Each node  
 5 consists of four transmitter/receivers (transceivers) **5a, 5b, 5c, 5d, 15a, 15b, 15c, and 15d** that transmit 250Mbps each.

Each transceiver **5a, ..., 5d, 15a, ..., 15d** is connected to one end of one of four pair of unshielded twisted-pair cable **10a, 10b, 10c, and 10d**. The  
 10 transmitter **2** of each transceiver **5a, ..., 5d, 15a, ..., 15d** forms a five level pulse amplitude modulated (PAM-5) shaped pulse signal that is transferred through the hybrid network **6** to one of the unshielded twisted-pair cable **10a, ..., 10d**. The transmitted signal traverses the unshielded twisted-pair cable **10a, ..., 10d** and is transferred through the hybrid network **6** to the receiver **4**. The received signal is  
 15 sensed, retimed, equalized and transferred to other circuitry for extraction of the digital data.

The full-duplex bi-directional transmission consists of transmitting and receiving data simultaneously in both directions on each of the four wire pairs,  
 20 minimizing the symbol rate (and thus, the occupied signal bandwidth) on each wire pair by one half, as compared to unidirectional transmission and reception. The hybrid network **6** is used to enable bi-directional transmission over single wire pairs by filtering out the transmit signal at the receiver. The hybrid network

**6** has good trans-hybrid loss to minimize the amount of transmitter signal that is coupled into the receiver **4**, but it still cannot remove all of the transmitted signal from the adjacent transmitter **2**. The residual transmitted signal from the adjacent transmitter **2** from the hybrid **6** is defined as the transmit echo signal **25**.

5

Since the unshielded twisted-pair cable **10a**, **10b**, **10c**, **10d** are placed in close proximity to each other, often within the same cable, the crosstalk **20a**, **20b**, and **20c** from transmitters within the same gigabit Ethernet node are coupled to the receiver **2**. The near-end crosstalk **20a**, **20b**, and **20c** and the transmit echo signal **25** must be cancelled from the receive signal to permit recovery of the transmitted signal.

10

Refer now to Fig. 2 for a more detailed discussion of the structure of a gigabit Ethernet node at one end of a bundled cable **10** containing four unshielded twisted-pair cable **10a**, ..., **10d**. Each transmitter **4a**, **4b**, **4c**, and **4d** receives an encoded and scrambled symbol to be transmitted from the side-stream scrambler and symbol encoder **30**, which in turn has received the digital data to be transferred from the Gigabit Media Independent Interface (GMII) **75**. The digital transmit filter **35** shapes the symbol to be transmitted to condition the transmitted spectrum. The digital-to-analog converter **40** creates the five level pulse amplitude modulation signal that is then transferred to the hybrid network **6a** for transmission on the unshielded twisted-pair cable **10a**.

15

20

A similar pulse amplitude modulated signal is simultaneously transmitted from a transmitter connected at the opposite end of the unshielded twisted-pair cable **10a**. The received signal is separated from the transmitted signal in the hybrid network **6a** and is the input to the analog-to-digital converter **45**. The digitized received signal is the feed-forward equalizer (FFE) **50** to compensate for signal distortion introduced in the communication channel. The feed-forward equalizer **50** combined with a feedback equalizer or decision feedback equalizer **80** often provides better signal equalization than linear equalization when the transmission medium (cable **10**) introduces strong signal attenuation with specific frequency regions. The feed-forward equalizer **50** does not modify the noise (echo, crosstalk, etc.).

The input signals from the side-stream scrambler and symbol encoder **30** to each transmitter **2b**, **2c**, and **2d** are the inputs to the near-end crosstalk cancellers **55a**, **55b**, and **55c** and to the echo canceller **60**. The near-end crosstalk cancellers **55a**, **55b**, and **55c** and the echo canceller **60** reproduce the near-end echo interference and the near-end crosstalk interference that is present in the received signal. The outputs of the near-end crosstalk cancellers **55a**, **55b**, and **55c** and the echo canceller **60** are the inputs to the summing circuit **65**. The equalized digitized received signal is transferred from the feed-forward equalizer **50** to the summing circuit **65**. The summing circuit **65** combines the reproduction of the echo interference and the near-end crosstalk interference and the equalized digitized received signal to cancel the echo

interference signal and the near-end crosstalk signals induced to the received signal as described above.

The Viterbi decoder and side-stream descrambler **70** provide error  
5 correction and resequencing of the receive signal to recover the digital data that is transferred to the Gigabit Media Independent Interface (GMII) **75** for further processing.

The near-end echo canceller **60** and the crosstalk cancellers **55a**, **55b**,  
10 and **55c** are known in the art and have been applied to applications such as **100** Base-T Ethernet, asynchronous transfer mode (ATM), local area networks (LAN), and telephone communication networks.

U. S. Patent 4,995,104 (Gitlin) describes a receiver that includes an  
15 interference canceller, which receives a corrupted signal and makes an estimate of the desired signal, subtracts the estimated desired signal from a delayed version of the received signal to form an estimate of the interference signal, then forms a final estimate of the desired signal by subtracting the estimated interference from a second delayed version of the received signal.

20

U. S. Patent 5,329,586 (Agazzi) teaches an echo canceling circuit and associated method for canceling errors encountered in data communications



decomposing a lookup-table nonlinear echo canceller into a plurality of smaller lookup tables, and combining outputs of the lookup tables.

U. S. Patent 5,887,032 (Cioffi) discusses a method and apparatus for  
5 crosstalk cancellation (e.g., NEXT interference) from received signals on a line  
by adaptively estimating the crosstalk interference from the other lines having  
interfering transmissions and by canceling the crosstalk interference using the  
estimated crosstalk interference.

10 U. S. Patent 4,669,116 (Agazzi) discloses an echo cancellation circuit for  
use with full-duplex data transmission systems. The echo canceller can operate  
in spite of time invariant non-linearities in the echo channel or in the  
implementation of the echo canceller itself (such as in D/A converters).

15 "A Pipelined Adaptive NEXT Canceller," Im, et al., IEEE Transactions on  
Signal Processing, pp. 2252 - 2258, Aug. 1998 Vol. 46 Issue: 8 ISSN: 1053-  
587X describes a near-end crosstalk (NEXT) canceller using a fine-grain  
pipelined architecture.

20 "100BASE-T2: 100 Mbit/S Ethernet Over Two Pairs Of Category-3  
Cabling" Cherubini, et al., 1997 IEEE International Conference on  
Communications, pp. 1014 - 1018, 1997 Vol. 2, discusses the 100BASE-T2  
physical layer specification for the receivers, particularly the adaptive digital

filters that are required for echo and NEXT cancellation, equalization, and interference suppression.

As described above, near-end echo comes from the imperfections of the near-end hybrid network **6a** that separates received signal from the transmitted signal and takes the significant part of the overall signal energy. The near-end echo signal degrades the receiver performance to a great extent and is a large source of error in the received signal. Therefore, the near-end echo canceller **60** is used to reduce the echo signal in the received signal. An adaptive echo cancellation technique is normally used because of its superior performance. For the receivers like gigabit Ethernet receivers, the performance requirement for the echo canceller is severe, and robustness of the received signal processing is required. Near-end crosstalk (NEXT), as described above, comes from the cross-coupling of the unshielded twisted-pair cable **10a**, **10b**, **10c**, and **10d** within a cable bundle and is one of the major sources of noise for the received signal.

In order to insure that the near-end echo and near-end crosstalk are minimized, a separate near-end echo/near-end crosstalk cancellation technique is necessary. The cancellation technique must not interact with other circuits in the receiver. In a receiver adopting a randomizing scrambler in the side-stream scrambler and symbol encoder **30**, a correlator maybe used for the echo cancellation as shown in Fig. 3. A correlator **100** obtains the echo signal

response for the transmitted symbols  $X(k)$  115. Once the echo/NEXT signal response is acquired, a Finite Impulse Response (FIR) filter 105 set with the coefficients  $C_0, \dots, C_j$  125 obtained by the correlator 100 generates the duplicated echo  $e(k)$  135 and subtracts the duplicated echo/NEXT signal  $e(k)$  135 from the received signal  $X(k)$  115 at the receiver. The coefficients  $C_0, \dots, C_j$  125 at the FIR 105 may be updated once they are set. However, the coefficients  $C_0, \dots, C_j$  125 at the FIR 105 are not usually updated once set because it usually takes thousands of symbols to generate new coefficients  $C_0, \dots, C_j$  125 from the received signal  $X(k)$  115 in the correlator.

In a time varying echo/NEXT channel, such as the gigabit Ethernet, fixed coefficients  $C_0, \dots, C_j$  125 cannot serve the purpose of the echo/NEXT cancellation since they cannot reflect the changes of the channel characteristics. Therefore, an update method for the coefficients  $C_0, \dots, C_j$  125 is necessary. A windowed measurement for the coefficients  $C_0, \dots, C_j$  125 is possible, but a more preferred way is to update the coefficients  $C_0, \dots, C_j$  125 to reflect the most recent parameters of the channel.

Refer now to Fig. 4 for a discussion of the correlator 100. Each coefficient  $C_0, \dots, C_j$  125 of the FIR filter 105 is the normalized product of the received signal and a delayed version of the transmitted symbol  $b(k)$  20. That is

$$C_j(k) = N(x(k) * b(k - j))$$

where:

$C_j$  is the value of each coefficient **125** of the FIR filter **105**.

$N$  is a normalizing factor for the coefficients **125**.

$X(k)$  is the magnitude of the received signal **115**.

5  $b(k-j)$  is the magnitude of the delayed transmitted signal **120**.

The multiplier circuit **150a, 150b, 150c, ..., 150d** receives the received signal  $X(k)$  **115** and the delayed transmitted signals  $b(k-j)$  **165a, 165b, 165c, ..., 165d**. The delayed transmitted signal  $b(k-j)$  **165a, 165b, 165c, ..., 165d** is the transmitted signal  $b(k)$  **120** successively delayed through each of the unit delay elements **150a, 150b, 150c, ..., 150d**. The product of the received signal  $X(k)$  **115** and the delayed transmitted signal **165a, 165b, 165c, ..., 165d** is the output of the multiplier **150a, 150b, 150c, ..., 150d** and the input of the normalization circuit **160a, 160b, 160c, ..., 160d**. The product is normalized to form the coefficients  $C_0, C_1, C_2, ..., C_j$  **125**, by summing a large number of products and dividing the sum of the squares of the delayed transmitted signal  $b(k-j)$ . Thus, each of the coefficients is determined as:

20 
$$C_j = \frac{\sum_{k=0}^n (x(k) * b(k-j))}{\sum_{k=0}^n (b(k-j))^2}$$

where;

n is the number of symbols used to determine the coefficient  $C_j$ .

In the conventional prior art, the number of symbols  $n$  used to determine the coefficient  $C_j$  is 1024. Therefore, for example, the first coefficient  $C_0$  becomes

$$C_0 = \frac{\sum_{k=0}^{1023} (x(k) * b(k))}{\sum_{k=0}^{1023} (b(k))^2}$$

### Summary of the Invention

An object of this invention is to provide a communication transmitting and receiving system in which the effects of near-end echo and near-end crosstalk from the communication medium are mitigated.

Another object of this invention is to provide an apparatus, which is included in a communication receiving system for adaptively reproducing the near-end echo and near-end crosstalk signal, which are then subtracted from the received signal to mitigate the effects of the near-end echo and near-end crosstalk.

Further, another object of this invention is to adaptively generate filter coefficients for a Finite Impulse Response filter to reproduce the near-end echo and near-end crosstalk.

5

To accomplish the above objects, an apparatus to cancel echo and crosstalk interference in a receiver of a communication system having simultaneous transmission and receiving on a communication medium includes an adaptive correlator and a finite impulse response filter. The adaptive correlator is connected to a receiving circuit to acquire received signals from the communication medium. Further, the adaptive correlator is connected to at least one of a plurality of transmission channels of the communication system to acquire at least one transmitted signal from the adjacent transmission channels. The adaptive correlator generates a reproduction of the echo response of the received signals to near-end echo and near-end crosstalk interference from the transmitted signals at an arrival of each received signal.

10

15

The finite impulse filter is connected to the receiving circuit to acquire the received signals, and is connected to the adaptive correlator to receive a plurality of filter coefficients. The finite impulse filter reproduces the near-end echo and near-end crosstalk signals from the received signals based on the values of the plurality of filter coefficients. The reproduced near-end echo or near-end

20

crosstalk signals are combined with the received signals to cancel any echo and crosstalk interference from the received signals;

The filter coefficients are regenerated in the adaptive correlator at the  
 5 arrival of each received signal and whereby each new filter coefficient is a weighted sum of a previous coefficient and one received signal multiplied by a time delayed version of one transmitted signal.

A first embodiment of the adaptive correlator has at least one first  
 10 delaying means connected to one of the transmission channels to delay one of the transmitted signals. At least one first multiplying means is connected to the receiving circuit and one of the first delaying means to multiply the received signal by one delayed transmitted signal to produce a product of the received signals and the one delayed transmitted signal. At least one second multiplying  
 15 means is connected to one of the first multiplying means to receive the product of the received signals multiplied by the one delayed transmitted signal and multiply this product by a first weighting factor ( $\frac{\beta}{\sigma^2}$ ) to produce a first intermediate coefficient factor.

20 The adaptive correlator has at least one second delaying means to delay and retain the previous coefficient. At least one third multiplying means is connected to one second delaying means to multiply the previous coefficient by one minus a second weighting factor ( $\beta$ ) to produce a second intermediate

coefficient factor. One of the second multiplying means and one of the third multiplying means is connected to one of a group of at least one summing means to add the first intermediate coefficient factor and the second intermediate coefficient factor to produce one new filter coefficient. The first weighting factor is a quotient of the second weighting factor divided by a variance ( $\sigma^2$ ) of the transmitted signal. The second weighting factor  $\beta$  is chosen in a manner similar to an equivalent weighting factor used in to what is termed a leaky recursive least squares method to calculate the coefficients of an adaptive filter. For this embodiment of this invention, a number of the symbols  $n$  (for instance,  $n=256$  symbols) is chosen and the weighting factor  $\beta$  is equal to the inverse of the number of the symbols. That is:

$$\beta = \frac{1}{n} = \frac{1}{256} \cong .004$$

The received signals and the transmitted signals are digitized to form binary numbers indicating magnitudes of samples of the received signal and the transmitted signal.

A second embodiment of the adaptive correlator has at least one first delaying means connected to one of the transmission channels to receive and delay on of the digitized samples of the transmitted signal and at least one first shifting means connected to the receiving circuit and one of the first delaying means to shift one of the digitized samples of the received signal according to the binary number of the one digitized sample of the delayed transmitted signal



to produce the product of one received signal and the one time delayed transmitted signal. The adaptive correlator has at least one second shifting means to shift the product of the one received signal and the one time delayed transmitted signal by a first weighting factor ( $\frac{1}{\sigma^2}$ ) to form a weighted product of

5 the one received signal and the one time delayed transmitted signal.

Further, the adaptive correlator has at least one second delaying means to delay and retain the previous coefficient. One adder/subtractor means of a group of at least one adder/subtractor means is connected to one second

10 shifting means and one second delaying means to combine the previous coefficient with the weighted product to form a partially weighted sum. One third shifting means of a group of at least one third shifting means is connected to one adder/subtractor to shift the partially weighted sum by a second weighting factor ( $\beta$ ) to form an intermediate weighted sum. One adding means of a group of at

15 least one adding means is connected to one second delaying means and to one third shifting means to additively combine the partially weighted sum and the intermediate weighted sum to generate the new filter coefficient.

In the second embodiment, the first weighting factor is the inverse of the

20 variance ( $\sigma^2$ ) of the transmitted signal and the second weighting factor  $\beta$ , as described above, is chosen in a manner similar to an equivalent weighting factor used in to what is termed a leaky recursive least squares method to calculate the coefficients of an adaptive filter. For this embodiment of this invention, a number

of the symbols  $n$  (for instance,  $n=256$  symbols) is chosen and the weighting factor  $\beta$  is equal to the inverse of the number of the symbols. That is:

$$\beta = \frac{1}{n} = \frac{1}{256} \cong .004$$

5

### **Brief Description of the Drawings**

Fig. 1 is a simplified diagram of the basic structure of a gigabit Ethernet communication link of the prior art.

Fig. 2 is a block diagram of a transceiver of a gigabit Ethernet communication system of the prior art.

Fig. 3 is a block diagram of a near-end echo and near-end crosstalk canceller of the prior art.

Fig. 4 is a schematic diagram of a correlator of the near-end echo and near-end crosstalk canceller of the prior art.

Fig. 5 is a schematic diagram of a first embodiment of a correlator of a near-end echo canceller and a near-end crosstalk canceller of this invention.

Fig. 6 is a schematic diagram of a second embodiment of a correlator of a near-end echo canceller and a near-end crosstalk canceller of this invention.

Figs. 7a-7c are flow diagrams of embodiments of the method to cancel  
 5 near-end echo/near-end crosstalk from a received signal in a communication system of this invention

### Detailed Description of the Invention

To meet the severe receiver requirements of the gigabit Ethernet, the  
 10 near-end echo/near-end crosstalk canceller of this invention has a correlator 100 of Fig. 3 that creates each coefficient  $C_0, \dots, C_j$  125 of the FIR filter 105 that is the function of the previous coefficient. Each coefficient  $C_0, \dots, C_j$  125 is the weighted sum of the previous coefficient and the received signal  $X(k)$  115 multiplied by a time delayed version of the transmitted symbol  $b(k)$  120 and is  
 15 summarized as follows:

$$C_j(k+1) = (1-\beta) * C_j(k) + \frac{\beta}{\sigma^2} * x(k) * b(k-j) \quad \text{EQ. 1}$$

where:

$C_j(k)$  is the previous coefficient.

$C_j(k+1)$  is the filter coefficient for the FIR filter for the  
 20 next received signal.

$X(k)$  is the present received signal.

$\mathbf{b(k-j)}$  is the transmitted signal delayed by  $j$  delay units.

$\sigma^2$  is the variance of the transmitted symbol. For gigabit Ethernet  $\sigma^2 = 2$ .

5

$\beta$  is a weighting factor.

The weighting factor  $\beta$  is chosen in a manner similar to an equivalent weighting factor used in to what is termed a leaky recursive least squares method to calculate the coefficients of an adaptive filter. For this embodiment of this invention, a number of the symbols  $n$  (for instance,  $n=256$  symbols) is chosen and the weighting factor  $\beta$  is equal to the inverse of the number of the symbols. That is:

$$\beta = \frac{1}{n} = \frac{1}{256} \cong .004$$

15

Refer now to Fig. 5 for a discussion of a first embodiment of the correlator circuit of the near-end echo/near-end crosstalk cancellation circuit of this invention. The received signal  $\mathbf{X(k)}$  115 and the delayed transmitted signals  $\mathbf{b(k-j)}$  240a, 240b, 240c, ..., 240d are the inputs to each of the first multipliers 200a, 200b, 200c, ..., 200d. The delayed transmitted signals  $\mathbf{b(k-j)}$  are the outputs of each of the unit delay elements 205a, 205b, 205c, ..., 205d. The unit delay elements 205a, 205b, 205c, ..., 205d successively delay the transmitted signal  $\mathbf{b(k)}$  120 to form the delayed transmitted signals  $\mathbf{b(k-j)}$  240a, 240b, 240c, ..., 240d.

The output products **245a, 245b, 245c, ..., 245d** and the first weighting factor  $(\frac{\beta}{\sigma^2})$  **215** are inputs to the second multipliers **210a, 210b, 210c, ..., 210d**.

The outputs of the second multipliers **210a, 210b, 210c, ..., 210d** form the  
 5 weighted products **250a, 250b, 250c, ..., 250d**.

Each of the new filter coefficients  $C_0(k+1), \dots, C_j(k+1)$  **225a, 225b, 225c, ..., 225d** is the input to each of the unit delay elements **230a, 230b, 230c, ..., 230d** to form the previous filter coefficients **255a, 255b, 255c, ..., 255d**. A  
 10 second weighting coefficient  $(\beta)$  **240** and the previous filter coefficients **255a, 255b, 255c, ..., 255d** are the inputs to the third multipliers **235a, 235b, 235c, ..., 235d**. The outputs of the third multipliers **235a, 235b, 235c, ..., 235d** form the weighted previous filter coefficients **260a, 260b, 260c, ..., 260d**.

15 The weighted products **250a, 250b, 250c, ..., 250d** and the weighted previous filter coefficients **260a, 260b, 260c, ..., 260d** are respectively the inputs to the summing circuits **220a, 220b, 220c, ..., 220d** to be additively combined to form the new filter coefficients  $C_j(k+1)$  **225a, 225b, 225c, ..., 225d**. The new filter coefficients  $C_j(k+1)$  **225a, 225b, 225c, ..., 225d** are placed at the inputs **125**  
 20 of the FIR filter **105** of Fig. 3 to set the FIR filter **105** to reproduce the near-end echo/near-end crosstalk for the received signal  $X(k)$  **115** at a next instant.

It can be shown that the function of EQ. 1 can be rewritten to the form:

$$C_j(k+1) = C_j(k) + \beta \left( \frac{x(k) * b(k-j)}{\sigma^2} - C_j(k) \right) \quad \text{EQ. 2}$$

As described above, the weighting factor  $\beta$  is chosen in a manner similar to an equivalent weighting factor used in to what is termed a leaky recursive least squares method to calculate the coefficients of an adaptive filter. For this embodiment of this invention, a number of the symbols  $n$  (for instance,  $n=256$  symbols) is chosen and the weighting factor  $\beta$  is equal to the inverse of the number of the symbols. That is:

$$\beta = \frac{1}{n} = \frac{1}{256} \cong .004$$

Since the transmit signals  $b(k)$  120 and the received signals  $X(k)$  115 are digitized samples of the signals transmitted and received on the communication medium (cable 10 of Fig. 2), the multiplication can be performed with shift registers. Refer now to Fig. 6 for a discussion of a correlator 100 of a second embodiment of the near-end echo/near-end crosstalk canceller of this invention.

The digital form of the transmitted symbol  $b(k)$  is the input to each of the first unit delay elements 305a, 305b, 305c, ..., 305d to form the delayed transmitted symbols 340a, 340b, 340c, ..., 340d. The sampled digitized received signal 115 and the delayed transmitted signals 340a, 340b, 340c, ..., 340d are the inputs to the first shifters 300a, 300b, 300c, ..., 300d. The first shifters 300a, 300b, 300c, ..., 300d shift the sampled digitized received signal 115 according to

the values of the delayed transmitted signals **340a, 340b, 340c, ..., 340d** to form the output products **345a, 345b, 345c, ..., 345d**.

The output products **345a, 345b, 345c, ..., 345d** and a first weighting factor **315** are the inputs respectively to the second shifters **310a, 310b, 310c, ..., 310d**. The first weighting factor **315** in this embodiment is the inverse of the variance ( $\sigma^2$ ) of transmitted symbols. As described before, for gigabit Ethernet the variance of the transmitted symbols ( $\sigma^2$ ) is 2.

The second shifters **310a, 310b, 310c, ..., 310d** each shift the output products **345a, 345b, 345c, ..., 345d** according to the binary value of the first weighting factor ( $\frac{1}{\sigma^2}$ ) to form the weighted products **350a, 350b, 350c, ..., 350d**.

The new filter coefficients **C<sub>j(k+1)</sub> 325a, 325b, 325c, ..., 325d** are the inputs to the second delay elements **330a, 330b, 330c, ..., 330d**. The new filter coefficients **C<sub>j(k+1)</sub> 325a, 325b, 325c, ..., 325d** are delayed and retained for one timing cycle to become the previous filter coefficients **355a, 355b, 355c, ..., 355d**.

The weighted products **350a, 350b, 350c, ..., 350d** and the previous filter coefficients **355a, 355b, 355c, ..., 355d** are subtractively combined in the arithmetic combining circuits **370a, 370b, 370c, ..., 370d** to form the preliminary weighted sums **375a, 375b, 375c, ..., 375d**. The preliminary weighted sums

375a, 375b, 375c, ..., 375d and the previous coefficients 355a, 355b, 355c, ..., 355d are the input to the summing circuits 320a, 320b, 320c, ..., 320d where they are additively combined to form the new filter coefficients  $C_0(k+1)$ ,  $C_1(k+1)$ ,  $C_2(k+1)$ , ...,  $C_j(k+1)$  225a, 225b, 225c, ..., 225d. The new filter coefficients

5  $C_0(k+1)$ ,  $C_1(k+1)$ ,  $C_2(k+1)$ , ...,  $C_j(k+1)$  225a, 225b, 225c, ..., 225d, as stated prior, are the inputs 125 to the FIR filter 105 of Fig. 3, to set the FIR filter 105 to reproduce the near-end echo/near-end crosstalk for the received signal  $X(k)$  115 at the next digitized sample of the received signal  $X(k)$  115.

10 Since the transmit symbols and the received signals are digital words that respectively are inputs to the digital-to-analog converter 40 of Fig. 2 and outputs from the analog-to-digital converter 45 of Fig. 2, it is possible to perform the reproduction of the near-end echo/near-end crosstalk as digital words within a computer system such as a digital signal processor. A method to cancel near-

15 end echo interference and near-end crosstalk interference that is implemented in a digital signal processor is illustrated in Figs. 7 a-c.

A method to cancel echo interference and crosstalk interference present in a received signal from a communication medium begins with acquiring 400 the

20 received signal with the echo interference and the crosstalk interference and acquiring 405 the transmitted signals that generate the echo interference and the crosstalk interference. The transmitted signal is then delayed 410 to form a delayed transmitted signal. The received signal is then correlated with at least



one transmitted signal at each cycle of the received signal to generate **415** a new filter coefficient as a weighted sum of a previous filter coefficient and the received signal multiplied by the delayed transmitted signal. The received signal is then filtered **420** to reproduce the echo interference and the crosstalk interference. The reproduction of the echo interference and the crosstalk interference are received combined **425** with the received signal to cancel the echo interference and the crosstalk interference in the received signal.

A first embodiment of the correlating of the received signal begins with at least one transmit signal to generate **415** the new filter coefficients begins by multiplying the delayed signal by at least one of the transmitted signals to form a first product. The first product is then multiplied **435** by a first weighting factor  $(\frac{\beta}{\sigma^2})$  to form a first weighted product.

The previous filter coefficient are multiplied **440** by a second weighting factor  $(1-\beta)$  to form a second weighted product. The first weighted product and the second weighted product are then summed **445** to form the weighted sum. The first weighting factor is the quotient of the factor  $(\beta)$  divided by the variance of the transmitted signal  $(\sigma^2)$ . As stated above the variance  $(\sigma^2)$  of the transmitted signal for gigabit Ethernet is 2. The second weighting factor is one minus the factor  $(\beta)$ .

As previously described, the weighting factor  $\beta$  is chosen in a manner similar to an equivalent weighting factor used in to what is termed a leaky recursive least squares method to calculate the coefficients of an adaptive filter. For this embodiment of this invention, a number of the symbols  $n$  (for instance,  $n=256$  symbols) is chosen and the weighting factor  $\beta$  is equal to the inverse of the number of the symbols. That is:

$$\beta = \frac{1}{n} = \frac{1}{256} \cong .004$$

A second embodiment of the correlating the received signal with at least one transmit signal to generate **415** the new filter coefficient begins by shifting **450** the received signal according to the delayed transmit signal to form a product of the received signal and the delayed transmit signal. The product of the received signal and the delayed transmit signal is further shifted **455** according to a first weighting factor ( $\frac{1}{\sigma^2}$ ) to form a first weighted product. The first weighted product is additively combined with the previous filter coefficient to form a first preliminary weighted sum.

The first preliminary weighted sum is then shifted **470** by a second weighting factor ( $\beta$ ) to form a second weighted product. The second weighted product and the previous filter coefficient are then additively combined **475** to generate the new filter coefficient.

In the second embodiment, the first weighting factor is the inverse of the variance ( $\sigma^2$ ) of the transmitted signal and the second weighting factor is the factor  $\beta$ .

5        The second weighting factor  $\beta$  is chosen, as above described, in a manner similar to an equivalent weighting factor used in to what is termed a leaky recursive least squares method to calculate the coefficients of an adaptive filter. For this embodiment of this invention, a number of the symbols  $n$  (for instance,  $n=256$  symbols) is chosen and the weighting factor  $\beta$  is equal to the  
10        inverse of the number of the symbols. That is:

$$\beta = \frac{1}{n} = \frac{1}{256} \cong .004$$

While this invention has been particularly shown and described with reference to the preferred embodiments thereof, it will be understood by those  
15        skilled in the art that various changes in form and details may be made without departing from the spirit and scope of the invention.

The invention claimed is:

1. An apparatus to cancel echo and crosstalk interference in a receiver of a communication system having simultaneous bidirectional transmission and receiving on a communication medium comprising:

5           an adaptive correlator connected to a receiving circuit to acquire  
received signals from said communication medium, and connected  
to at least one of a plurality of transmission channels of said  
communication system to acquire at least one transmitted signal  
from the transmission channels, whereby said adaptive correlator  
10           generates filter coefficients representing an echo response of the  
received signals to echo and crosstalk interference from said  
transmitted signals at an arrival of each received signal; and  
a finite impulse filter connected to the receiving circuit to acquire the  
received signals, and connected to the adaptive correlator to  
15           receive a plurality of the filter coefficients, which when combined  
with the received signals cancels any echo and crosstalk  
interference from said received signals;  
whereby said filter coefficients are regenerated in the adaptive correlator  
at the arrival of each received signal and whereby each new filter  
20           coefficient is a weighted sum of a previous coefficient and one  
received signal multiplied by a time delayed version of one transmitted  
signal.

2. The apparatus of claim 1 wherein the adaptive correlator comprises:

at least one first delaying means connected to one of the transmission channels to delay one of the transmitted signals;

at least one first multiplying means connected to the receiving circuit

5 and one of the first delaying means to multiply the received signal by one delayed transmitted signal to produce a product of the received signals and the one delayed transmitted signal;

at least one second multiplying means connected to one of the first

10 multiplying means to receive the product of the received signals by the one delayed transmitted signal and multiply said product by a first weighting factor to produce a first intermediate coefficient factor;

at least one second delaying means to delay and retain the previous coefficient;

15 at least one third multiplying means connected to one second delaying means to multiply the previous coefficient by a second weighting factor to produce a second intermediate coefficient factor; and

at least one summing means connected to one second multiplying

20 means and one third multiplying means to add the first intermediate coefficient factor and the second intermediate coefficient factor to produce one new filter coefficient.

3. The apparatus of claim 2 wherein the first weighting factor is a quotient of the second weighting factor divided by a variance of the transmitted signal.

5 4. The apparatus of claim 2 wherein the second weighting factor is equal to an inverse of a number of a group of the transmitted signals.

10 5. The apparatus of claim 1 wherein the received signals and the transmitted signals are digitized to form binary numbers indicating magnitudes of samples of the received signal and the transmitted signal.

15 6. The apparatus of claim 5 wherein the adaptive correlator is comprising:  
at least one first delaying means connected to one of the transmission channels to receive and delay on of the digitized samples of the transmitted signal;

at least one first shifting means connected to the receiving circuit and one of the first delaying means to shift one of the digitized samples of the received signal according to the binary number of the one digitized sample of the transmitted signal to produce the received signal and the one time delayed transmitted signal;

20 at least one second shifting means to shift the product of the received signal and the one time delayed transmitted signal by a first

weighting factor to form a weighted product of the received signal  
and the one time delayed transmitted signal;

at least one second delaying means to delay and retain the previous  
coefficient;

5 at least one adder/subtractor means connected to one second shifting  
means and one second delaying means to combine the previous  
coefficient with the weighted product to form a partially weighted  
sum;

at least one third shifting means connected to one adder/subtractor to  
10 shift the partially weighted sum by a second weighting factor to  
form an intermediate weighted sum;

at least one adding means connected to one second delaying means  
and to one third shifting means to additively combine the partially  
weighted sum and the intermediate weighted sum to generate the  
15 new filter coefficient.

7. The apparatus of claim 6 wherein the first weighting factor is the inverse  
of the variance of the transmitted signal.

20 8. The apparatus of claim 6 wherein the second weighting factor is equal to  
an inverse of a number of a group of the transmitted signals.

9. A communication system having simultaneous bi-directional communication on multiple communication media comprising:

a plurality of transmitters, whereby each transmitter is connected to one end of one communication medium and induces crosstalk interference to other transmission media,

a plurality of receivers, whereby each receiver is connected in parallel with one transmitter at one end of one communication medium and receives an echo interference and the crosstalk interference from those transmitters at a same end of the communication medium as the receiver, and wherein each receiver comprises;

a receiver circuit to acquire received signals from the communication medium, and

at least one apparatus to cancel the echo interference and the crosstalk interference comprising;

an adaptive correlator connected to a receiving circuit to acquire received signals from said communication medium, and connected to at least one of a plurality of transmitters of said communication system to acquire at least one transmitted signal from the transmitters, whereby said adaptive correlator generates filter coefficients representing an echo response of the received signals to echo and



crosstalk interference from said transmitted  
signals at an arrival of each received signal;  
and

a finite impulse filter connected to the receiving circuit

5 to acquire the received signals, and connected  
to the adaptive correlator to receive a plurality  
of the filter coefficients, which when combined  
with the received signals cancels any echo and  
crosstalk interference from said received  
10 signals;

whereby said filter coefficients are regenerated in the adaptive correlator  
at the arrival of each received signal and whereby each new filter  
coefficient is a weighted sum of a previous coefficient and one  
received signal multiplied by a time delayed version of one transmitted  
15 signal.

10. The communication system of claim 9 wherein the adaptive correlator  
comprises:

at least one first delaying means connected to one of the transmitters  
20 to delay one of the transmitted signals;  
at least one first multiplying means connected to the receiving circuit  
and one of the first delaying means to multiply the received signal

by one delayed transmitted signal to produce a product of the received signals and the one delayed transmitted signal;

at least one second multiplying means connected to one of the first multiplying means to receive the product of the received signals by the one delayed transmitted signal and multiply said product by a first weighting factor to produce a first intermediate coefficient factor;

at least one second delaying means to delay and retain the previous coefficient;

at least one third multiplying means connected to one second delaying means to multiply the previous coefficient by a second weighting factor to produce a second intermediate coefficient factor; and

at least one summing means connected to one second multiplying means and one third multiplying means to add the first intermediate coefficient factor and the second intermediate coefficient factor to produce one new filter coefficient.

11. The communication system of claim 10 wherein the first weighting factor is a quotient of the second weighting factor divided by a variance of the transmitted signal.

12. The communication system of claim 10 wherein the second weighting factor is equal to an inverse of a number of a group of the transmitted signals.

13. The communication system of claim 9 wherein the received signals and the transmitted signals are digitized to form binary numbers indicating magnitudes of samples of the received signal and the transmitted signal.

5

14. The communication system of claim 13 wherein the adaptive correlator is comprising:

at least one first delaying means connected to one of the transmitters to receive and delay one of the digitized samples of the transmitted signal;

10

at least one first shifting means connected to the receiving circuit and one of the first delaying means to shift one of the digitized samples of the received signal according to the binary number of the one digitized sample of the transmitted signal to produce the received signal and the one time delayed transmitted signal;

15

at least one second shifting means to shift the product of the received signal and the one time delayed transmitted signal by a first weighting factor to form a weighted product of the received signal and the one time delayed transmitted signal;

20

at least one second delaying means to delay and retain the previous coefficient;

at least one adder/subtractor means connected to one second shifting means and one second delaying means to combine the previous

coefficient with the weighted product to form a partially weighted sum;

at least one third shifting means connected to one adder/subtractor to shift the partially weighted sum by a second weighting factor to form an intermediate weighted sum;

at least one adding means connected to one second delaying means and to one third shifting means to additively combine the partially weighted sum and the intermediate weighted sum to generate the new filter coefficient.

15. The communication system of claim 14 wherein the first weighting factor is the inverse of the variance of the transmitted signal.

16. The communication system of claim 14 wherein the second weighting factor is equal to an inverse of a number of a group of the transmitted signals.

17. A receiving system to acquire received signals from a communication medium having simultaneous full duplex communication with echo interference from a transmitter connected to said communication medium and crosstalk interference from transmitters attached to other communication media in close proximity to said communication media, whereby said receiving system comprises:

a receiver circuit to acquire received signals from the communication medium, and

at least one apparatus to cancel the echo interference and the crosstalk interference comprising;

5                   an adaptive correlator connected to a receiving circuit to acquire received signals from said communication medium, and connected to at least one of a plurality of transmission channels of said communication system to acquire at least one transmitted signal from the transmission channels, whereby said adaptive correlator generates filter coefficients representing an echo response of the received signals to echo and crosstalk interference from said transmitted signals at an arrival of each received signal; and

10                   a finite impulse filter connected to the receiving circuit to acquire the received signals, and connected to the adaptive correlator to receive a plurality of the filter coefficients, which when combined with the received signals cancels any echo and crosstalk interference from  
15                   said received signals;

20                   whereby said filter coefficients are regenerated in the adaptive correlator at the arrival of each received signal and whereby each new filter coefficient is a weighted sum of a previous coefficient and one

received signal multiplied by a time delayed version of one transmitted signal.

18. The receiving system of claim 17 wherein the adaptive correlator  
comprises:

at least one first delaying means connected to one of the transmission  
channels to delay one of the transmitted signals;

at least one first multiplying means connected to the receiving circuit  
and one of the first delaying means to multiply the received signal  
by one delayed transmitted signal to produce a product of the  
received signals and the one delayed transmitted signal;

at least one second multiplying means connected to one of the first  
multiplying means to receive the product of the received signals by  
the one delayed transmitted signal and multiply said product by a  
first weighting factor to produce a first intermediate coefficient  
factor;

at least one second delaying means to delay and retain the previous  
coefficient;

at least one third multiplying means connected to one second delaying  
means to multiply the previous coefficient by a second weighting  
factor to produce a second intermediate coefficient factor; and

at least one summing means connected to one second multiplying  
means and one third multiplying means to add the first intermediate

coefficient factor and the second intermediate coefficient factor to produce one new filter coefficient.

19. The receiving system of claim 18 wherein the first weighting factor is a quotient of the second weighting factor divided by a variance of the transmitted signal.
20. The receiving system of claim 18 wherein the second weighting factor is equal to an inverse of a number of a group of the transmitted signals.
21. The receiving system of claim 17 wherein the received signals and the transmitted signals are digitized to form binary numbers indicating magnitudes of samples of the received signal and the transmitted signal.
22. The receiving system of claim 20 wherein the adaptive correlator is comprising:
  - at least one first delaying means connected to one of the transmission channels to receive and delay on of the digitized samples of the transmitted signal;
  - at least one first shifting means connected to the receiving circuit and one of the first delaying means to shift one of the digitized samples of the received signal according to the binary number of the one digitized sample of the transmitted signal to produce the received signal and the one time delayed transmitted signal;

at least one second shifting means to shift the product of the received signal and the one time delayed transmitted signal by a first weighting factor to form a weighted product of the received signal and the one time delayed transmitted signal;

5 at least one second delaying means to delay and retain the previous coefficient;

at least one adder/subtractor means connected to one second shifting means and one second delaying means to combine the previous coefficient with the weighted product to form a partially weighted sum;

10 at least one third shifting means connected to one adder/subtractor to shift the partially weighted sum by a second weighting factor to form an intermediate weighted sum;

15 at least one adding means connected to one second delaying means and to one third shifting means to additively combine the partially weighted sum and the intermediate weighted sum to generate the new filter coefficient.

23. The communication system of claim 22 wherein the first weighting factor is the inverse of the variance of the transmitted signal.

20



24. The communication system of claim 22 wherein the second weighting factor is equal to an inverse of a number of a group of the transmitted signals.

5 25. A method to cancel echo interference and crosstalk interference present in a received signal from a communication medium, comprising the steps of:

acquiring the received signal with the echo interference and the

crosstalk interference;

10 acquiring transmitted signals that generate the echo interference and the crosstalk interference;

delaying said transmitted signals to form delayed transmitted signals;

correlating the received signal with at least one transmitted signal at

each cycle of the received signal to generate a new filter coefficient

15 as a weighted sum of a previous filter coefficient and the received signal multiplied by the delayed transmitted signal;

filtering said received signal to reproduce the echo interference and

the crosstalk interference; and

combining said received signal with the reproduction of the echo

20 interference and the crosstalk interference to cancel the echo

interference and the crosstalk interference in the received signal.

26. The method of claim 25 wherein the correlating the received signal with at least one transmit signal comprises the steps of:

multiplying at least one of the delayed transmitted signal by the

received signals to form a first product;

5 multiplying the first product by a first weighting factor to form a first weighted product;

multiplying the previous filter coefficient by a second weighting factor to form a second weighted product; and

10 summing the first weighted product and the second weighted product to form the weighted sum.

27. The method of claim 26 wherein the first weighting factor is created by subtracting a third weighting factor from one, whereby said third weighting factor is factor is equal to an inverse of a number of a group of the  
15 transmitted signals.

28. The method of claim 27 wherein the second weighting factor is the third weighting factor divided by a variance of the transmitted signal.

20 29. The method of claim 25 wherein the correlating the received signal with at least one transmit signal comprises the steps of:

shifting the received signal according to the delayed transmit signal to  
 form a product of the received signal and one delayed transmit  
 signal;

further shifting the product according to a first weighting factor to form  
 a first weighted product;

additively combining the first weighted product with the previous filter  
 coefficient to form a first preliminary weighted sum;

shifting said first preliminary weighted sum by a second weighting  
 factor to form a second weighted product; and

combining the second weighted product and the previous filter  
 coefficient to generate the new filter coefficient.

30. The method of claim 29 wherein the first weighting factor is the inverse of  
 a variance of the transmit signal.

31. The method of claim 29 wherein the second weighting factor is equal to  
 an inverse of a number of a group of the transmitted signals.

## Abstract

A communication transmitting and receiving system in which the effects of near-end echo and near-end crosstalk signal from the communication medium are mitigated by adaptively reproducing the near-end echo and near-end crosstalk signal, which is then subtracted from the received signal. Filter coefficients for a Finite Impulse Response filter are adaptively generated to reproduce the near-end echo and near-end crosstalk. The filter coefficients are regenerated for the Finite Impulse Response filter in an adaptive correlator at the arrival of each received signal and whereby each new filter coefficient is a weighted sum of a previous coefficient and one received signal multiplied by a time delayed version of one transmitted signal.





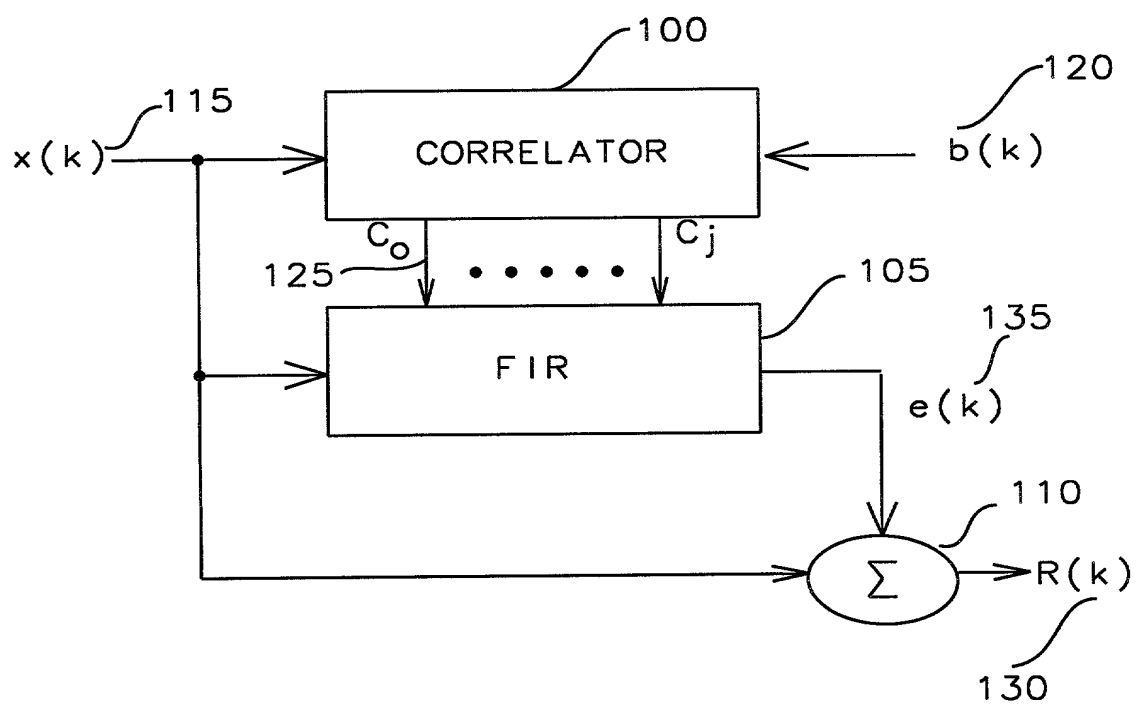


FIG. 3 - Prior Art

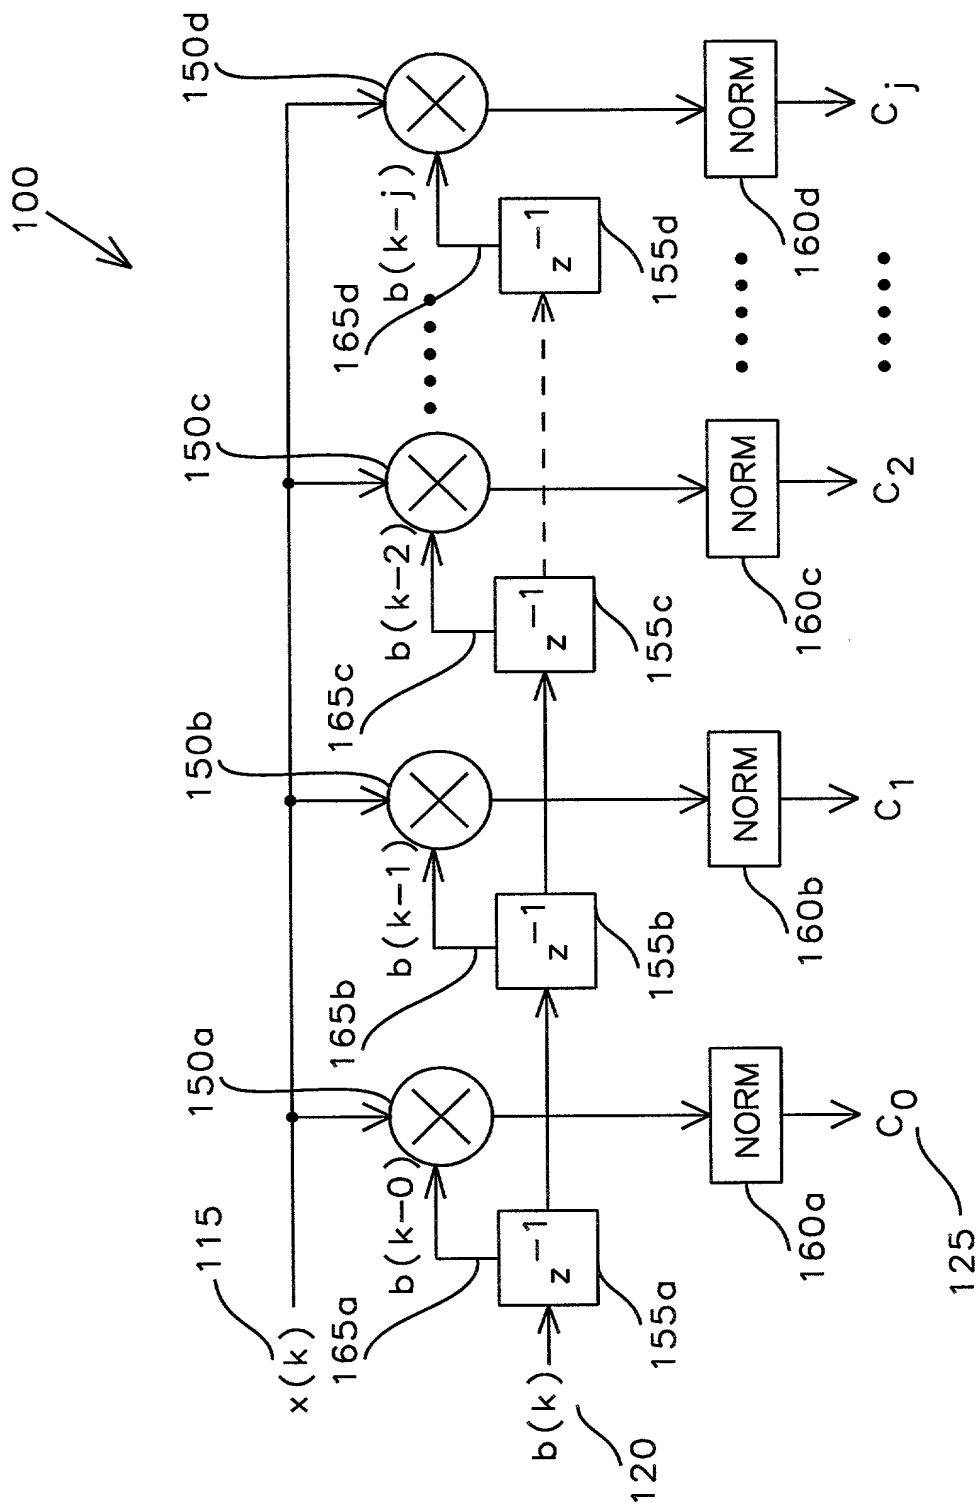


FIG. 4 - Prior Art



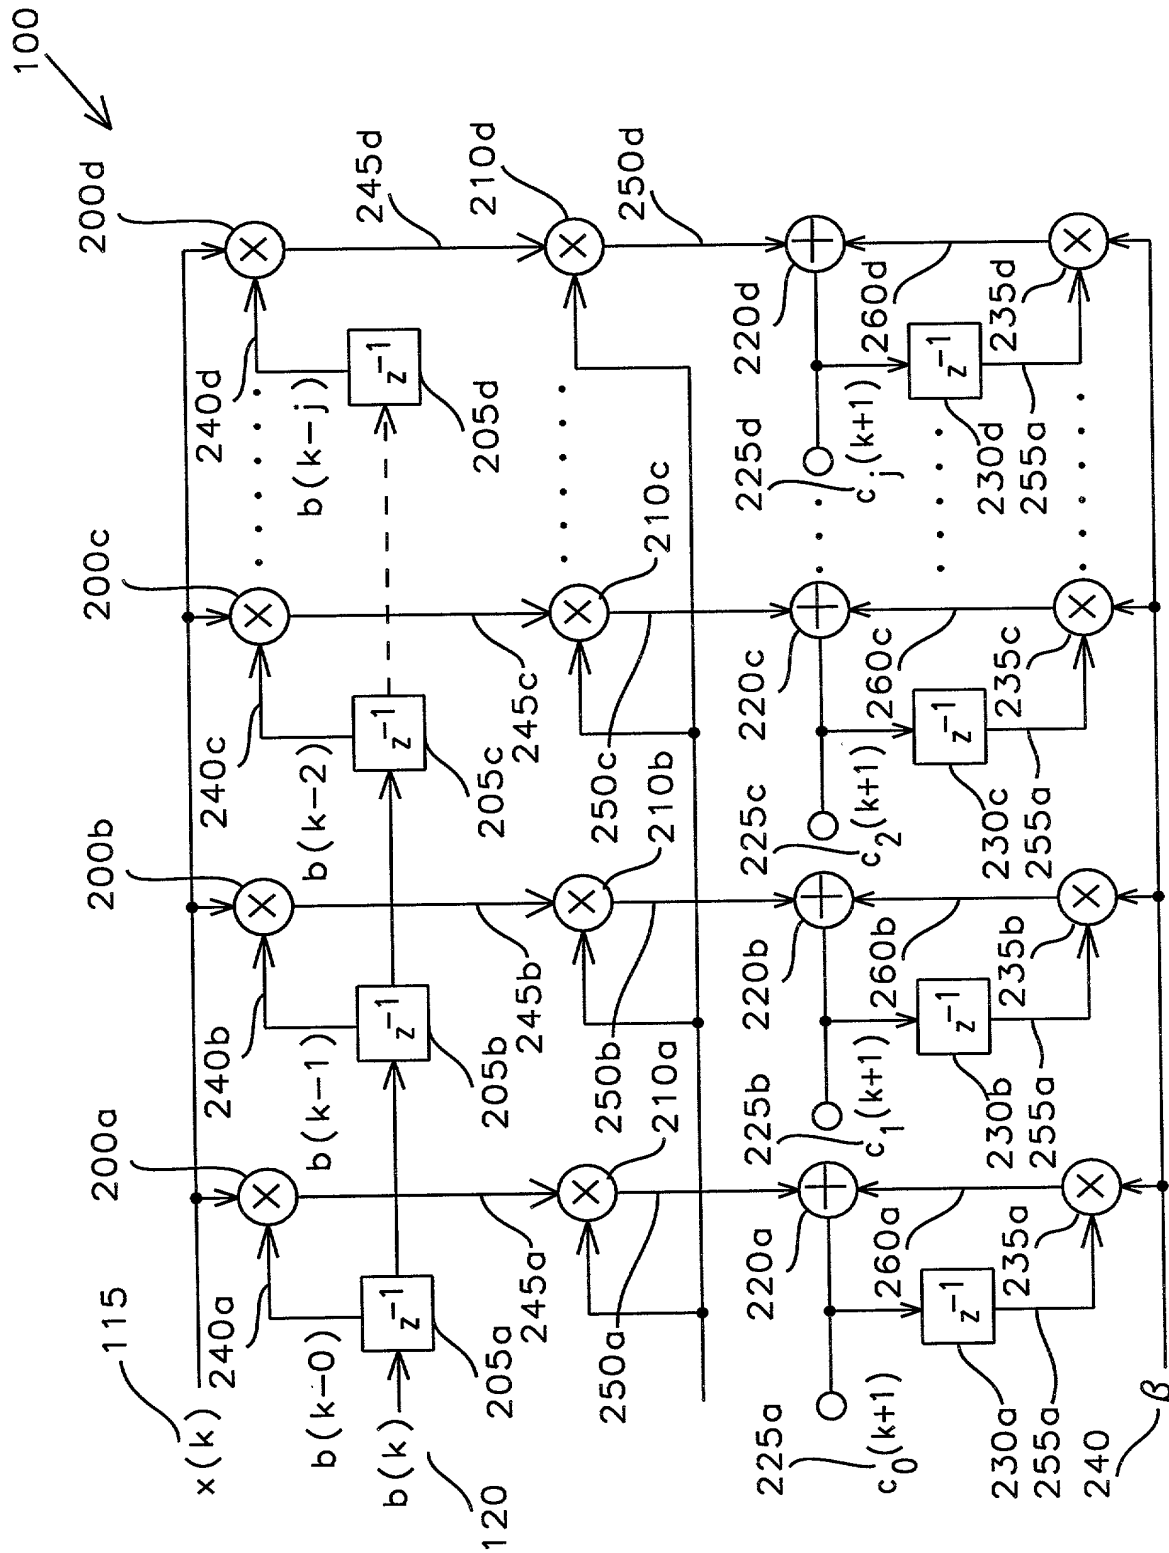


FIG. 5

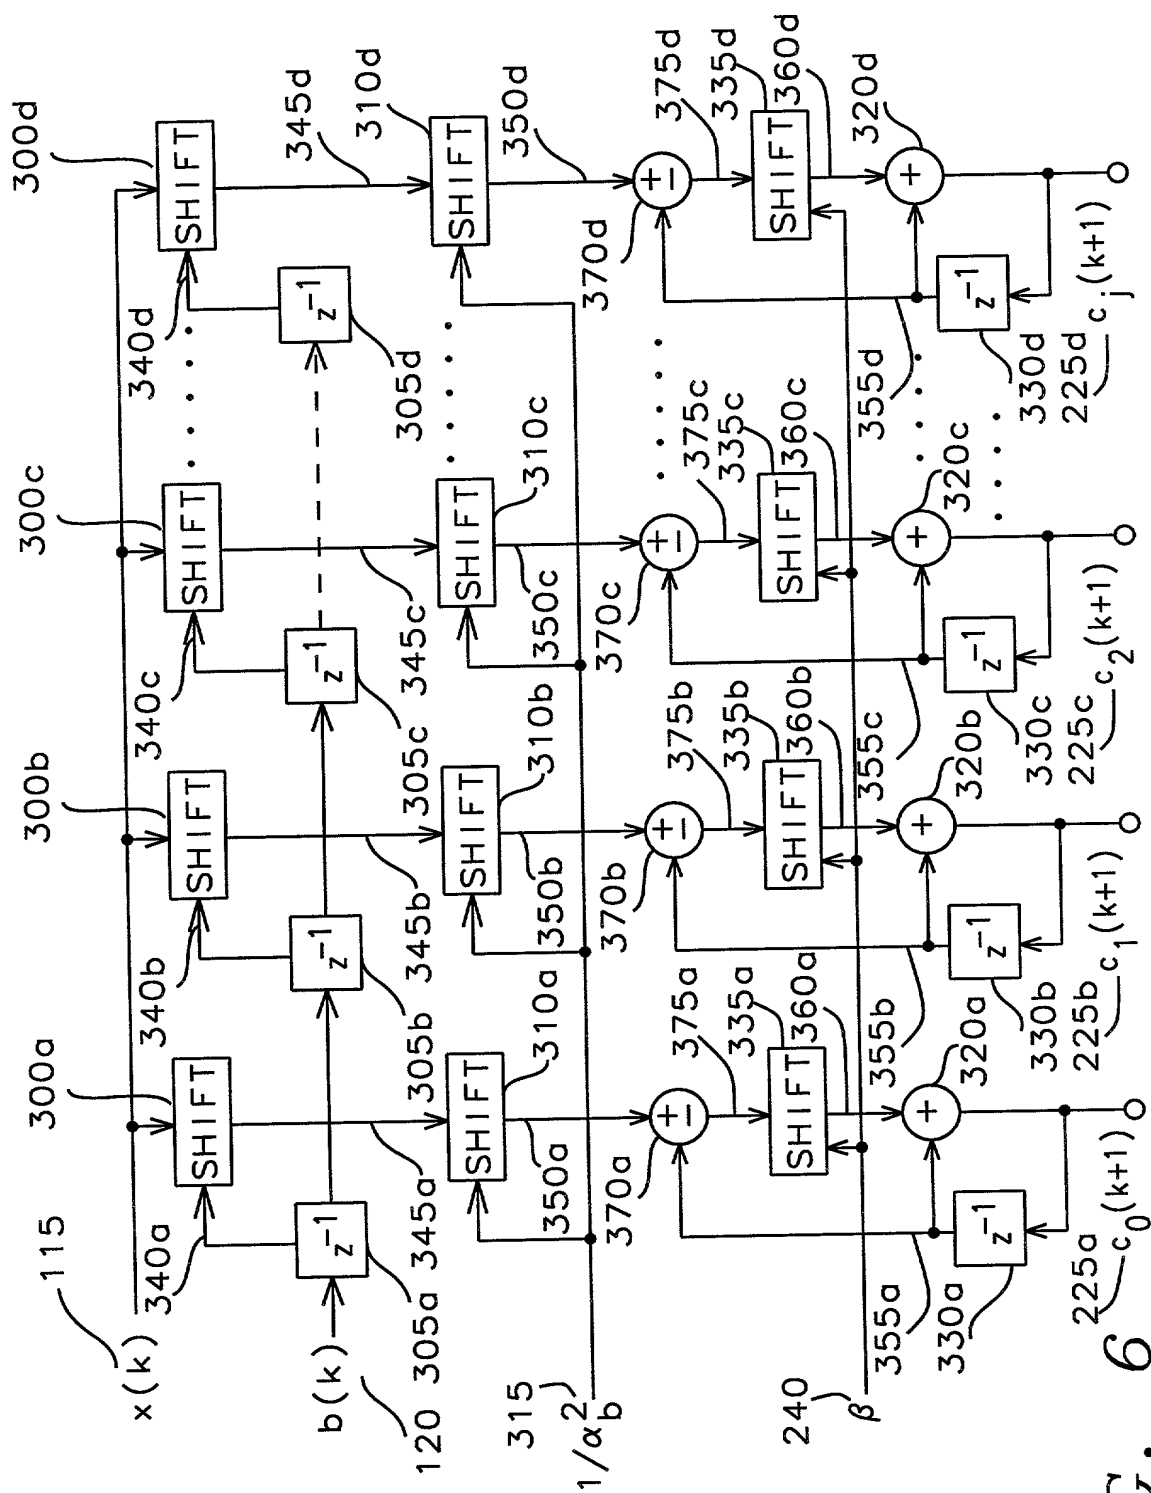


FIG. 6

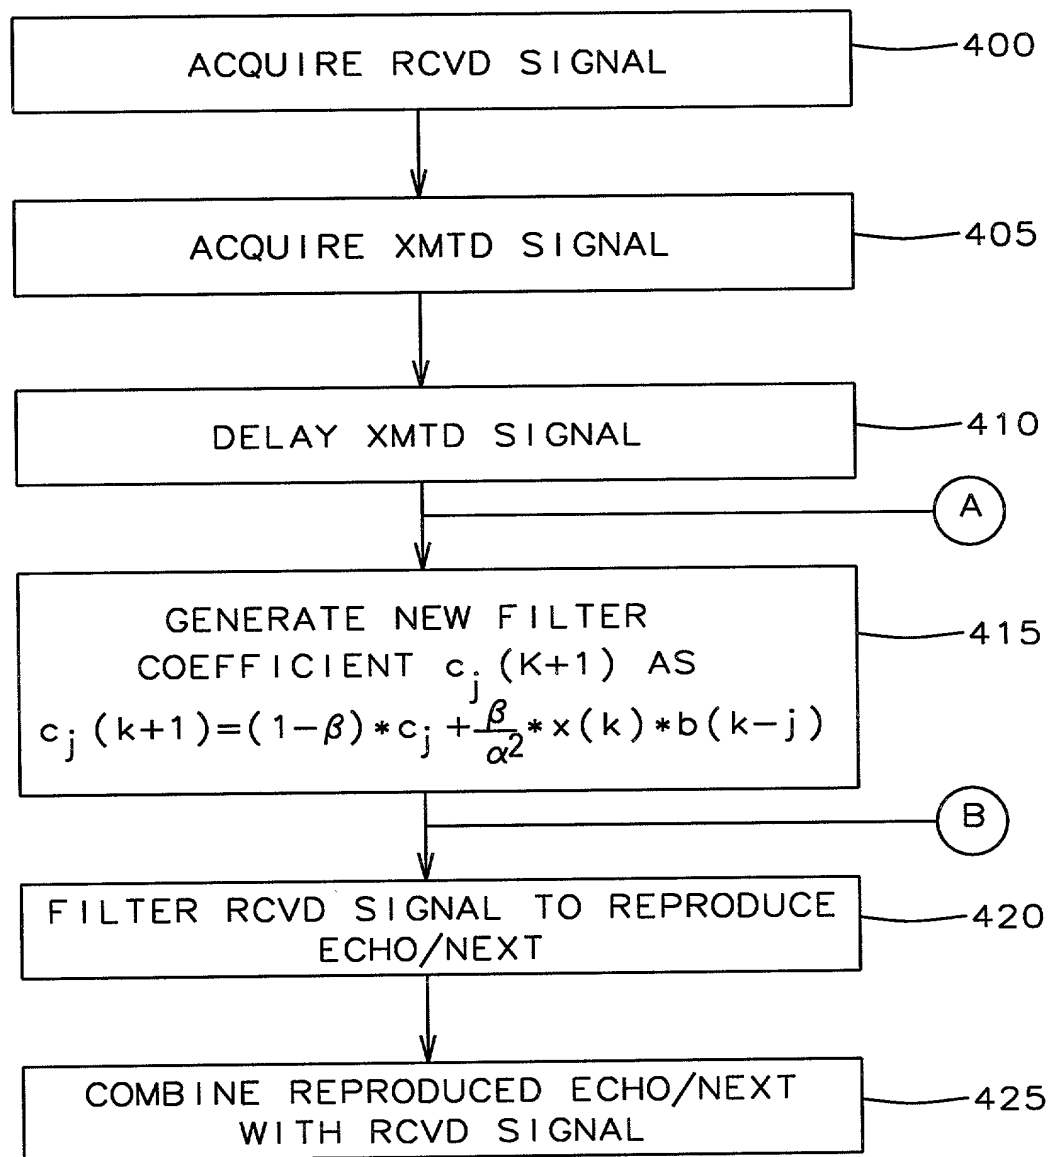


FIG. 7a

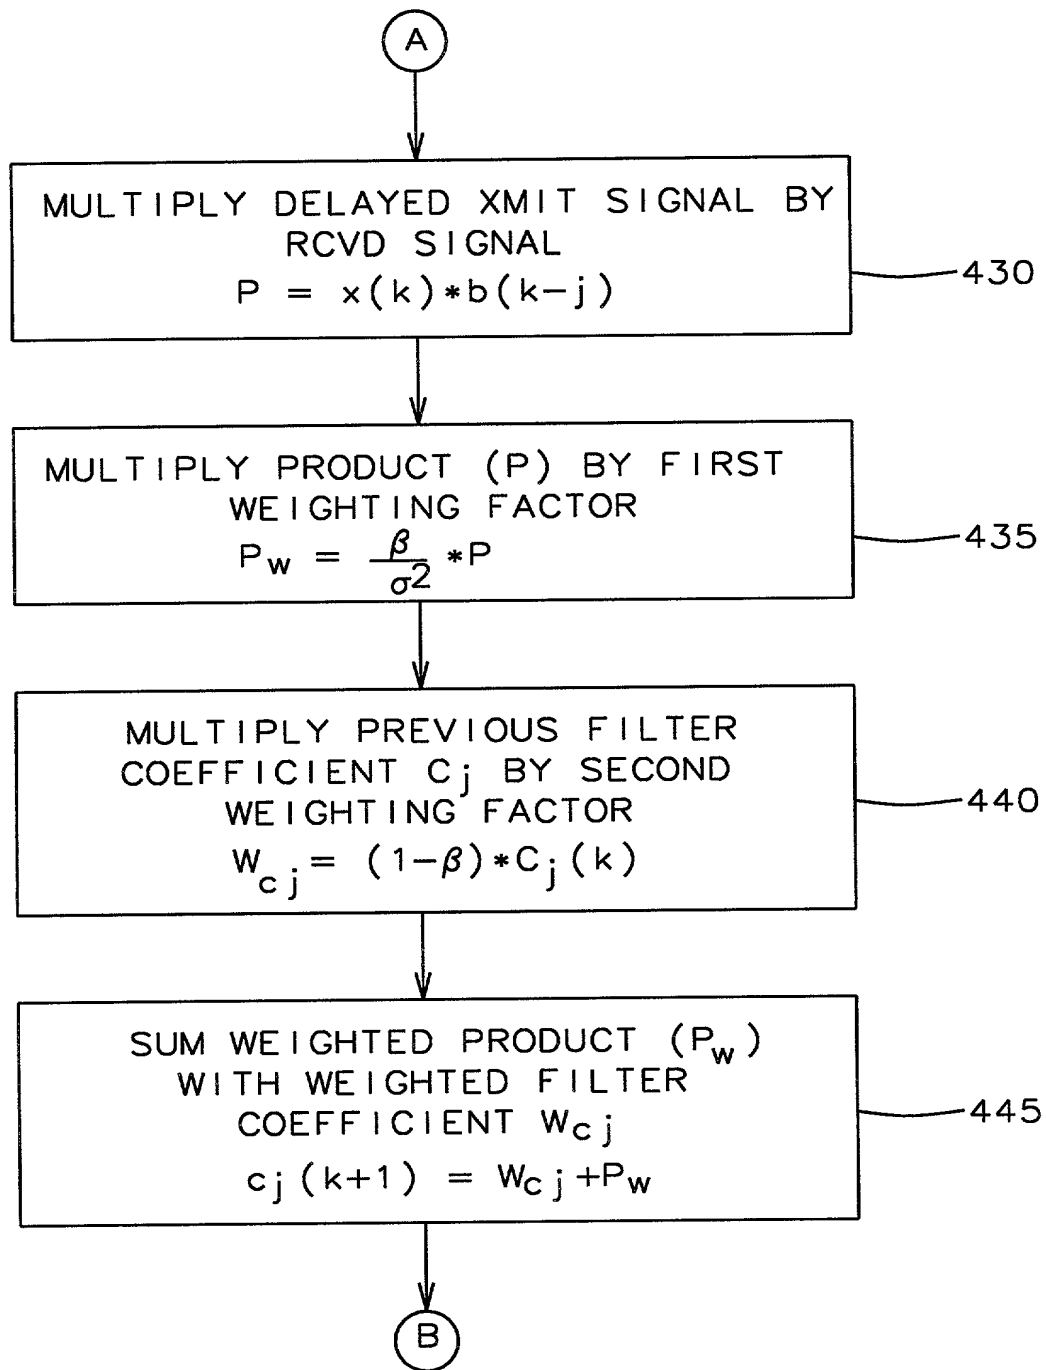


FIG. 7b

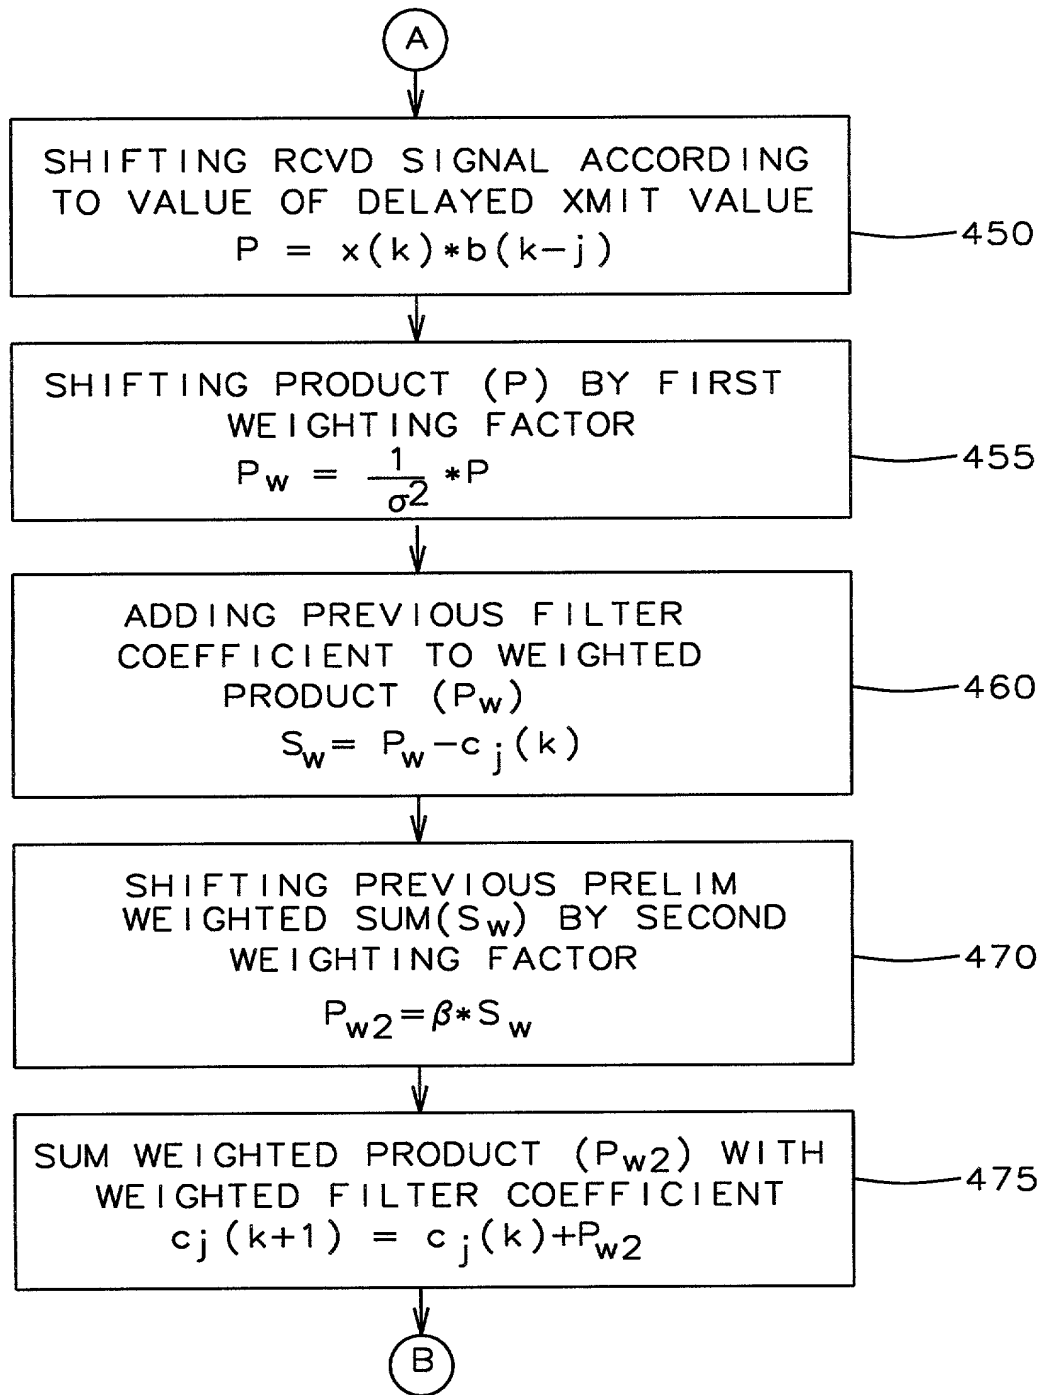


FIG. 7c

# DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

DOCKET NO. MV99-001

As a below named Inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **A Method And Apparatus For Digital Near-End Echo/Near-End Crosstalk Cancellation With Adaptive Correlation**

the specification of which (check one)

X is attached hereto.

was filed on \_\_\_\_\_

Application Serial No. \_\_\_\_\_

and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above Identified specification including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed:

(Number) (Country) (Day/Month/Year Filed)

(Number) (Country) (Day/Month/Year Filed)

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.) (Filing Date) (Status) (patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name & registration no.)

GEORGE O. SAILE. (Reg. No. 19,572), STEPHEN B. ACKERMAN (Reg. No. 37,761)

Send Correspondence to: 20 MCINTOSH DRIVE, POUGHKEEPSIE, NEW YORK 12603

Direct telephone Calls to: (name & telephone number) GEORGE O. SAILE NEW YORK 914 452 5863

Full name of sole or first inventor Beomsup Kim Date 12/8/99

Inventor's signature

5636 Stevens Creek Blvd. #292 Cupertino, CA 95014

Residence

Korean

Citizenship

2 Church Street, P.O. Box 1022, Hamilton HM DX Bermuda

Post Office Address

DOCKET NO. MV99-001